

FLUXUS® F/G721

**Setting Standards in Non-intrusive
Liquid and Gas Flow Measurement**

Oil & Gas

Chemical

Petrochemical

Water & Wastewater

Power Generation

District Energy

Pharmaceutical

Semiconductor

Food & Beverage

Mining

Energy Efficiency



FLEXIM Sets Standards
when measuring matters

Setting Standards

Reliable - Safe - Efficient

The FLUXUS® F/G721 is a technological breakthrough in the ultrasonic clamp-on flow measurement of liquids and gases.

With its new hardware design and improved, powerful digital signal processing, it surpasses any other non-intrusive ultrasonic flowmeter in accuracy, reliability and versatility.

Highly sophisticated signal filters, faster than ever processing capacities and substantially improved measurement algorithms make the FLUXUS® F/G721 a state-of-the-art measuring solution for even the most challenging applications. The meter adapts itself automatically to measurement conditions and compensates for perturbations such as beam dispersal and structure-borne noise, allowing for precise and reliable measurements. Extreme fast measurement cycles allow for precise real time monitoring of highly dynamic processes.

Pushing the Boundaries

FLUXUS® F/G721 offers non-intrusive flow measurement of virtually any kind of liquid or gas, from the smallest tubing to the largest penstock, independent of the pressure inside the pipe and over a very large temperature range. Due to its advanced technology, the measurement is unaffected by solid or gaseous entrainments or gas wetness and distinguishes itself by its unrivalled turndown ratio: even low flows down to only a few liters per hour can be recorded accurately.


As the flowmeter of choice for a very wide range of applications in virtually any industrial sector, the FLUXUS® F/G721 is available with two different enclosure types: aluminium for standard applications and stainless steel housing can be used in explosion hazard areas (ATEX, IECEx Zone 2, FM Class I /Div2).

Ready for Industry 4.0

The FLUXUS® F/G721 comes with all common communication protocols. HART, Modbus, Foundation Fieldbus, Profibus PA, BACnet and M-Bus allow bidirectional field communication and online diagnostics.

The FLUXUS® F/G721 is also one step ahead in terms of user guidance and diagnostics. It can be easily set up and configured via USB. Its ethernet connectivity provides additional bidirectional communication capabilities.



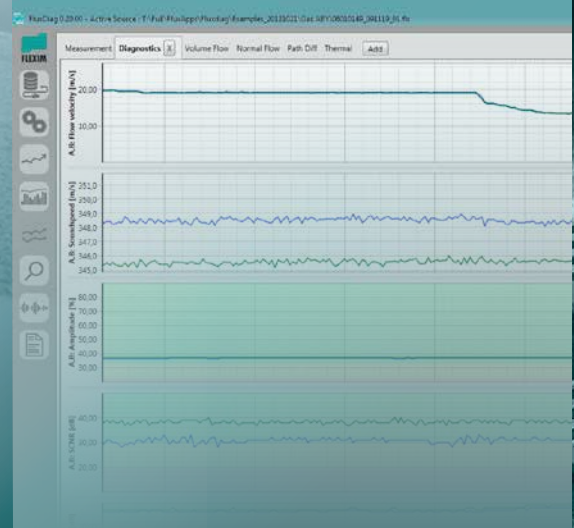

Unrivalled advantages of non-intrusive flow measurement with the FLUXUS® F/G 721:

- No process interruption - maintenance-free (no need for frequent work in hazardous areas)
- Certified for operation within hazardous areas (FM Class I, Div. 2)
- Fast measuring dynamics also capture highly pulsating flows
- Reliable measurements even of slurries, liquids with gaseous entrainments or wet gas (up to LVF of 5%)
- High operational safety with no risk of leaks
- Independent of pipe material, diameter, wall thickness and internal pressure and temperature
- Accurate and repeatable measurement readings - even at extremely low flow rates (high turndown ratio)
- Highly cost efficient in comparison to wetted instrumentation

Technical facts

Measurement uncertainty (volumetric flow rate):

FLUXUS® F721 (liquids)	± 1% of reading ±0.02 ft/s
FLUXUS® G721 (gases)	± 1 to 2% of reading ±0.02 ft/s

Transmitter

Explosion protection:

FLUXUS® F/G721	ATEX/IECEx Zone 2, FM Class I / Div 2 available
----------------	---

Power supply:

FLUXUS® F/G721	100 ... 230 V AC, 24 V DC, 12 V DC
----------------	------------------------------------

Outputs:

FLUXUS® F/G721	4 - 20 mA active / passive, 4 - 20 mA HART active / passive, pulse, frequency, binary
----------------	---

Inputs:

FLUXUS® F/G721	Pt100 / Pt1000, 4 - 20 mA active / passive, binary
----------------	--

Digital Communication:

FLUXUS® F/G721	Modbus RTU/TCP, BACnet MSTP/IP, M-Bus, Profibus PA, Foundation Fieldbus
----------------	---

Available transducers:

Explosion protection:

FLUXUS® F/G721	ATEX/IECEx Zone 1/Zone 2, FM Class I / Div 2
----------------	--

Pipe size range (inner diameter):

FLUXUS® F721	0.24 inch to 255.9 inch
FLUXUS® G721	0.28 inch to 63 inch

Temperature range (pipe wall):

FLUXUS® F721	-40 °F to +392 °F / WI: -328 °F to +1112 °F
FLUXUS® G721	-40 °F to +392 °F

Unique features of the FLUXUS® F/G 721:

- Highly accurate and reliable volume and mass flow measurement of liquids and gases as well as thermal energy
- Accurate and reliable metering - due to its built-in HybridTrek® mode even of particle-loaded or gas entrained liquids
- Virtually free of wear and tear with no maintenance required due to measurement outside the pipe wall
- Every measurement system is pre-calibrated in-house (traceable to national standards) and delivered with a calibration certificate
- Matched transducers, integrated temperature compensation (according to ANSI/ASME MFC-5.1-2011 regulations) and digital signal processing guarantee excellent zero point and flow measurement stability
- Permanent coupling with unique couplant pads, FlexSpring secured mounting fixtures guarantee durable contact pressure also on heavily vibrating pipes
- Bidirectional communication as well as remote setup and diagnostic capabilities

Versatile Applications



Oil & Gas

From wellhead to the gas station - everything is flowing. For the safe and efficient operation of the multitude of processes in hydrocarbon production, treatment and transport, all these flow rates need to be monitored. Harsh environments, challenging process conditions and highly explosive media place the highest demands on measuring equipment.

FLUXUS® F/G721 excels where others fail. Flow measurement from outside the pipe is independent of the pressure inside and not subject to wear and tear. In conjunction with the patented WaveInjector® mounting fixture, liquid flows can be measured in an unrivalled temperature range from -310 °F (for LNG) up to +1200 °F (e.g. for refinery applications). Due to its sophisticated signal processing, the FLUXUS® F/G721 provides reliable measurements even in the most demanding applications such as the measurement of pulsating flows with solid/gaseous contents or on lines carrying heavily moisturized gas. As the FLUXUS® F/G721 can also be used for non-intrusive media identification, it is the ideal allocation meter for tank terminals.



Chemical Industries

Modern, integrated chemical plants form highly complex networks of mass and energy flows. Safety takes top priority. Continuous monitoring of all relevant process parameters is essential for fault-free operations.

FLUXUS® F/G721 measures from the safe side - the outside of the pipe. The practical advantages of non-intrusive flow measurement are obvious: no wear and tear by the medium flowing inside the pipe, no risk of liquid leakage or fugitive gas emissions, no pressure loss and, above all, unlimited plant availability.



Water & Wastewater

Withdrawal of water usually begins at wells, reservoirs and large water tanks. Pipes with large nominal diameters also mean high costs for wetted instrumentation and for installation work - this is not the case with FLUXUS®. Moreover, the F/G721 offers exceptionally precise bidirectional flow measurement over a wide turndown ratio, which is especially important when capturing low flow velocities at off-peak times for leak control.

FLUXUS® F/G721 measures independently of the pipe dimension and material. Its advanced technology allows for non-intrusive flow measurement even on pre-stressed concrete cylinder pipes (PCCP) which may be several meters in diameter. Due to its built-in Hybrid Trek mode, wastewater slurries with high solid / gaseous contents can also be precisely monitored.





Energy Efficiency

Energy counts. In every respect. Energy is a key factor for human life, work and economy. Saving energy pays off. The FLUXUS® F721 Energy is the ideal solution to tap energy efficiency potentials non-intrusively, in HVAC applications as well as in industrial processes. Whether it is used for thermal power measurement in district heating networks or for monitoring the efficiency of an industrial heat exchanger, non-intrusive measurement never affects the safe supply in any way. With its excellent sensitivity for low flows and with highly accurate and paired temperature sensors, the FLUXUS® F721 Energy is particularly suited to accurate measurement of energy consumption in air conditioning systems.

With regard to gases, the FLUXUS® G721 is the perfect tool to measure the consumption of costly compressed air - non-intrusively without any potential for possible leaks.



Power

Safe operation and security of supply are essential in power generation. Therefore it is clear: It's better not to touch the pipe! This is even more evident, if you want to measure flow rates in the penstock of a hydro power plant or even in the primary circuit of a nuclear power plant.

FLUXUS® F/G721 stands for absolutely reliable flow measurement without any interruption to supply. In conjunction with the WaveInjector®, FLUXUS® also measures the flow of molten salts which are used as heat transfer fluids in concentrated solar power plants. Another typical application is the flow measurement of hot boiler feedwater and the identification of water / steam cuts in water drain lines of combined cycle power plants.



Other Industries

The application range of FLUXUS® is broad. The non-intrusive measurement principle also plays out its full potential in hygienic applications, such as in the pharmaceutical, food & beverage or even the semiconductor industries. By measuring from outside the pipe wall, direct media contact and potential media contamination can be ruled out. Other application fields include the mining sector and adjacent steel plants. Typical applications include the measurement of mineral slurries or acid-loaded streams - measurement points where non-invasive technology is always preferred in comparison to wetted flowmeter technologies.





FLEXIM

In partnership



FLEXIM is an active leader in many areas of process instrumentation. As a worldwide pioneer in the non-intrusive flow measurement of liquids and gases, FLEXIM has been leading the way in ultrasonic clamp-on flow metering for more than 25 years. In addition to non-intrusive flow measurement, FLEXIM specializes in innovative online process analysis using ultrasonic technology and refractometry. Year after year, the Berlin-based company continues its substantial investment in research and development in order to maintain and further improve its position as the industry leader. In keeping with its core principles, FLEXIM takes customer feedback very seriously. Every generation of FLEXIM products is directly driven by customer and industry needs.

The FLEXIM Commitment to Customer Service

FLEXIM considers itself not only a manufacturer of measuring instruments, but also a provider of technical and consulting services. These services include on-site measurements, laboratory analysis, project handling, training, commissioning, instrument rentals and consulting services. The company's focus and dedication is directed towards providing the highest quality equipment with the best support and service possible. Our aim is to set standards in all that we do.

**FLEXIM AMERICAS
Corporation
Headquarters
250-V Executive Drive
Edgewood, NY 11717
Phone: (631) 492-2300**

FLEXIM has offices located throughout North America. Please have a look for your local representative at:

www.flexim.com

or call us at:

1-888-852-PIPE

