

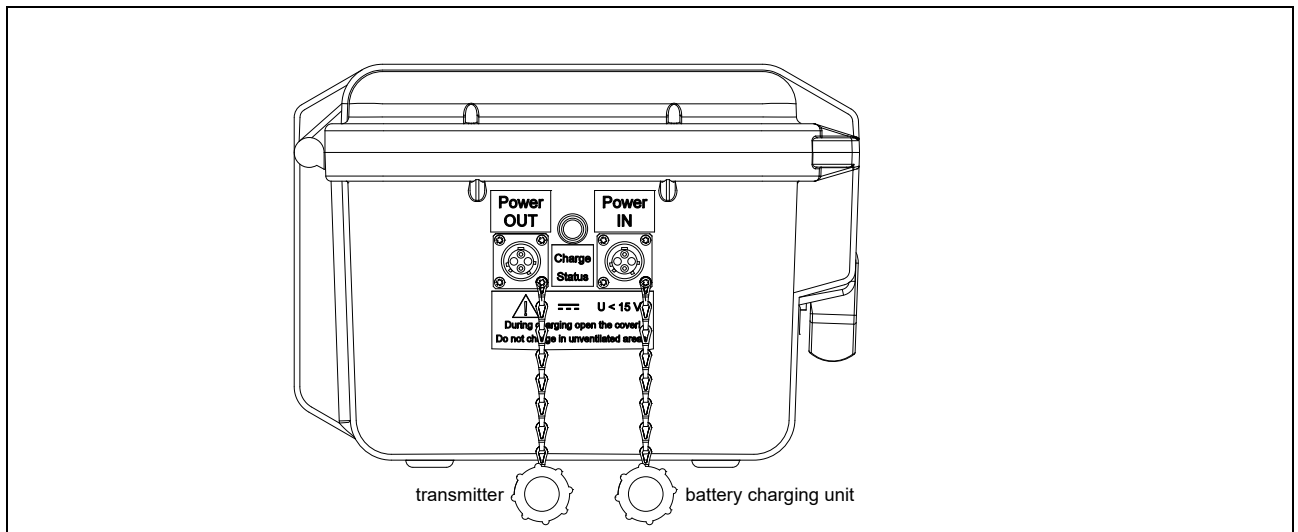
### Power pack PP026NN

#### Technical data




type		lead battery
connection		transmitter FLUXUS F401, F601, G601
voltage		12 V DC
capacity	Ah	26
operating time <sup>1</sup>	h	max. 168 F401 without outputs and backlight F601, G601 1 measuring channel, without outputs, inputs and backlight
ambient temperature	°C	-15...+50
charging temperature	°C	0...35
storing temperature	°C	-15...+40
weight	kg	11
<b>transport case</b>		
housing material		PP
degree of protection		IP67 (housing cover closed)
dimensions	mm	270 x 246 x 174
<b>accessories</b>		
adapter (optional)		
battery charging unit		100...240 V/50...60 Hz -> 12 V DC, min. 2.2 A

<sup>1</sup> power pack and integrated battery of the transmitter completely charged

#### Connection



#### Adapters

	FLUXUS F401
	FLUXUS F601, G601 order code: ACC-PO#601-/AP6 SN < 60111000
	FLUXUS F601, G601 SN ≥ 60111000