


### Damping material (optional)

Damping material will be used for the gas measurement to reduce acoustic noise influences on the measurement.

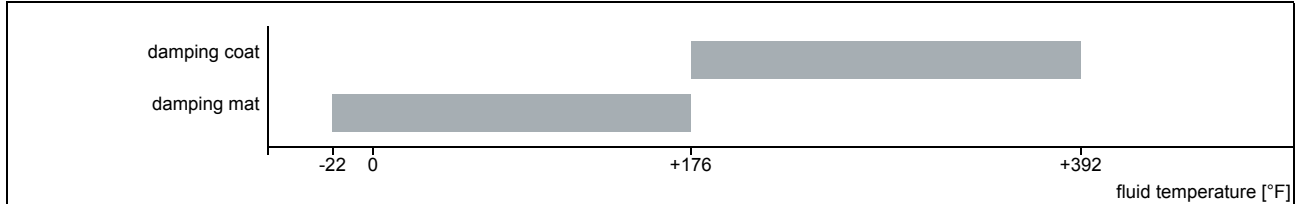

### Damping mats

see Technical specification TSFLUXUS\_G\*\*\*

### Damping coat

For high temperatures it is recommended to apply the damping coat onto the pipe.

### Technical data

material		multipolymeric matrix/inorganic ceramic coating
packing drum	gal	1
properties		heat resistant, inert

### Dimensioning

transducer	number of packing drums		
	outer pipe diameter		
	≤15.7	≤23.6	≤31.5
	in		
F	1	2	2
G	1	1	2
H	1	1	1
K	1	-	-
M	1	-	-
P	1	-	-
Q	1	-	-