

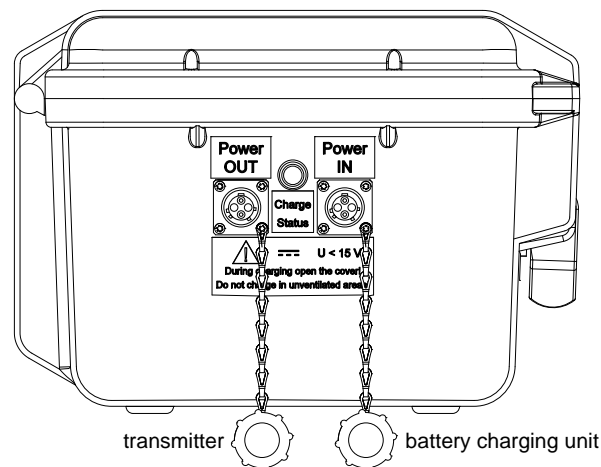
Power Pack PP026NN

Technical Data



type	lead battery
connection	transmitter FLUXUS F401, F601, G601
voltage	12 V DC
capacity	26 Ah
operating time ¹	max. 168 h F401 without outputs and backlight F601, G601 1 measuring channel, without outputs, inputs and backlight
ambient temperature	-15...+50 °C
charging temperature	0...35 °C
storing temperature	-15...+40 °C
weight	11 kg
transport case	
housing material	PP
degree of protection according to IEC/EN 60529	IP67 (housing cover closed)
dimensions	270 x 246 x 174 mm
accessories	
adapter (optional)	
battery charging unit	Ansmann part no. 9C94276 100...240 V/50...60 Hz -> 12 V DC

¹ power pack and integrated battery of the transmitter completely charged

Connection



Adapters

	FLUXUS F401
	FLUXUS F601, G601